

# SIPS - Deerwood JEA Water Main Project

**Contract No.:** 184571

**Client:** Jacksonville Electric Authority

**County:** Duval

**Construction Cost:** \$30M

**Reference:** Elizabeth DiMeo, P.E.



Project Manager

(904) 655-8139

dimeo@jea.com

## Project Description

This project consists of the construction of 20,759 LF of 30" SIPS Water Main, 3,548 LF of 6" Water Main, 3,908 LF of 24" Raw Water Main, and 225 LF of 4" Force Main, and other associated water main branches through an urban residential area. This project includes construction of 186 LF of 30" SIPS Water Main by Jack and Bore under a high traffic volume roadway, abandonment of 2,176 LF of existing water main by grout fill, and removal of 1,446 LF of existing water main. The project also includes reconstruction of 3 lane miles of roadway, subgrade, base, asphalt, construction of sidewalks, driveways, curb and gutter, drainage pipes, and other roadway features.

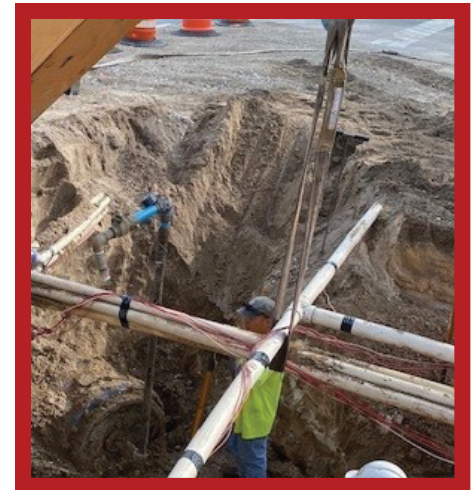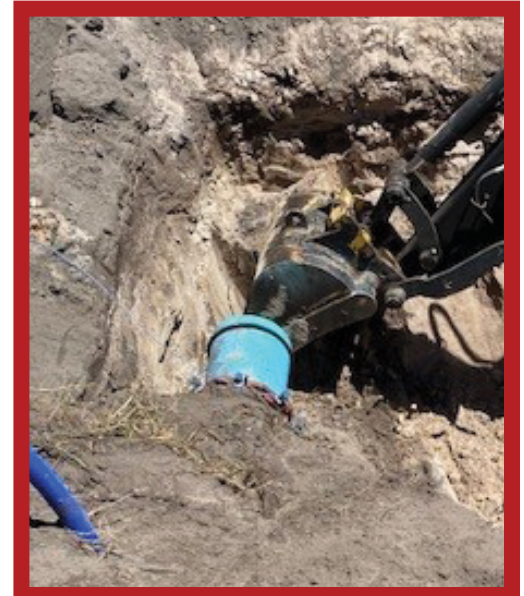

# VIA<sup>CS</sup>

- VIA CONSULTING SERVICES, INC. -

**Construction Engineering and Inspection Services**

10250 Normandy Blvd., Suite 304

Jacksonville, FL 32221

(904) 783-9842